




R.P.M. 2850


Curve N°	Code	Type	MOTOR			Power Supply	DN mm	Free Pass. mm	Weight Kg	code	
			Nominal P P2 (kW)	Nominal I I (A)	Starting I Is (A)						
1	7009018	G272M3D2-J6AB1	1,1	7,5	21	1ph 230V-50Hz	40	6	31	-	
	7009017	G272T3D2-J6AA0	1,4	3	8,4	3ph 400V-50Hz	40	6	31	-	
2	7000904	G272M3D1-J6AB1	1,1	7,5	21	1ph 230V-50Hz	40	6	31	-	
	7000951	G272T3D1-J6AA0	1,4	3	8,4	3ph 400V-50Hz	40	6	31	-	
3	7003534	G271M6D3-J6AB1	1,1	7,5	21	1ph 230V-50Hz	40	6	38	7003548	
	7003433	G271T6D3-J6AA0	1,4	3,5	14	3ph 400V-50Hz	40	6	38	7003441	
4	7003535	G271M6D2-J6AB1	1,8	10	35	1ph 230V-50Hz	40	6	38	7003547	
	7003432	G271T6D2-J6AA0	1,4	3,5	14	3ph 400V-50Hz	40	6	38	7003442	
5	7003536	G271M6D1-J6AB1	1,8	10	35	1ph 230V-50Hz	40	6	38	7002810	
	7003398	G271T6D1-J6AA0	2,4	5	21	3ph 400V-50Hz	40	6	38	7003443	
6	7003540	G209T6D2-J7AA0	3,2	6,5	31,8	3ph 400V-50Hz	40	7	54	7002631	
7	7003488	G209T6D1-J7AA0	3,2	6,5	31,8	3ph 400V-50Hz	40	7	54	7003489	
8	7003486	G210R6D4-J7AA2	4,1	8,5	50,1	3ph 400/690V-50Hz	40	7	68	7003487	
9	7003484	G210R6D3-J7AA2	5	11	65	3ph 400/690V-50Hz	40	7	68	7003485	
10	7003482	G210R6D2-J7AA2	5	11	65	3ph 400/690V-50Hz	40	7	68	7003483	
11	7003480	G210R6D1-J7AA2	5,7	12,5	73,7	3ph 400/690V-50Hz	40	7	68	7003481	

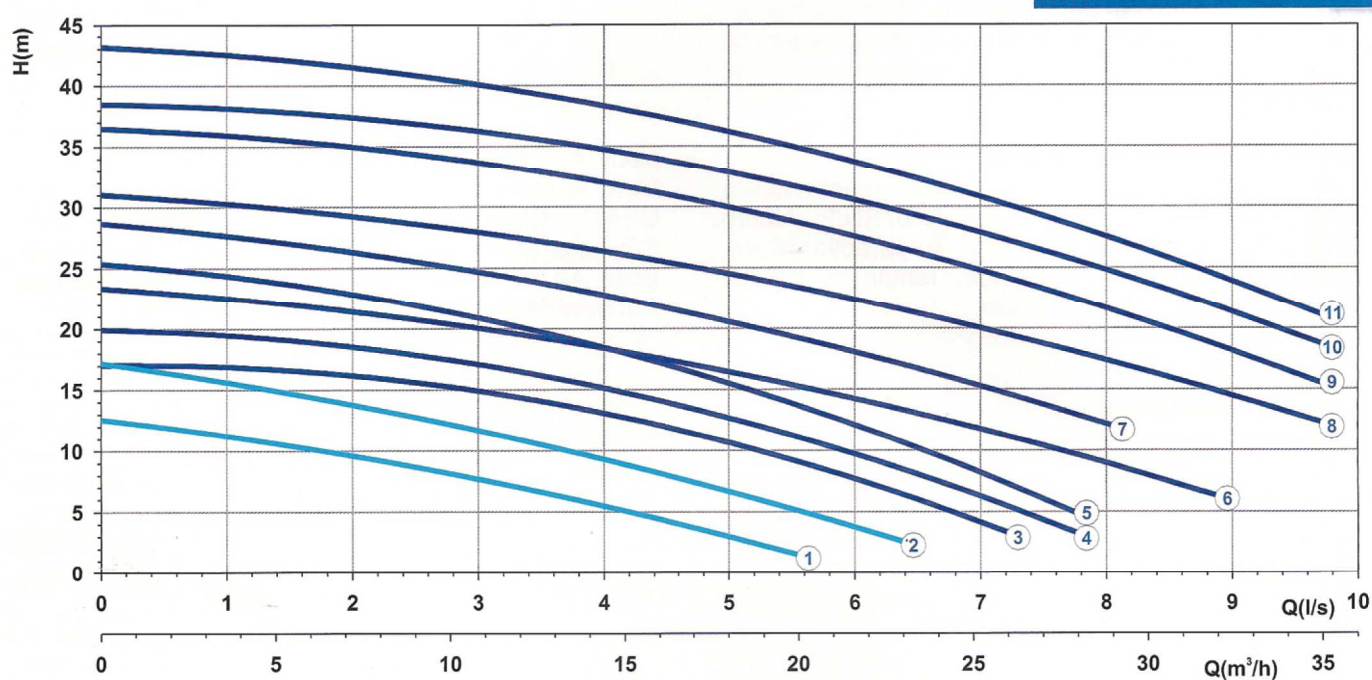

R.P.M. 2850

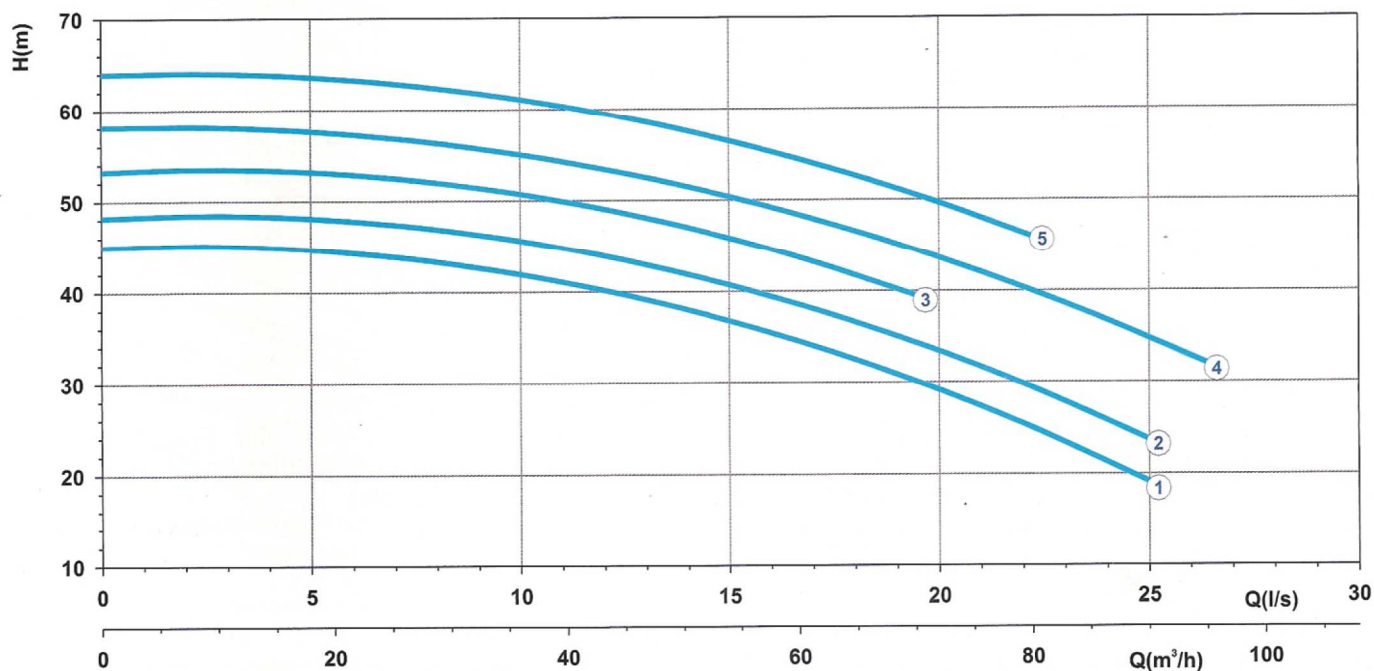

Curve N°	Code	Type	MOTOR			Power Supply	DN mm	Free Pass. mm	Weight Kg	code	
			Nominal P P2 (kW)	Nominal I I (A)	Starting I Is (A)						
1	7008371	G213R6D3-L10AA2	12	26,5	156	3ph 400/690V-50Hz	DN 65	10	200	7008447	
2	7008180	G213R6D2-L10AA2	14,9	29	171	3ph 400/690V-50Hz	DN 65	10	200	7008442	
3	7008622	G213R6D1-L10AA2	15,9	30	171	3ph 400/690V-50Hz	DN 65	10	200	7009365	
4	7008502	G216R6D2-L10AA2	22,4	40,1	237	3ph 400/690V-50Hz	DN 65	10	300	-	
5	7008454	G216R6D1-L10AA2	22,4	40,1	237	3ph 400/690V-50Hz	DN 65	10	300	-	

FOR FURTHER INFORMATION PLEASE CONTACT US:
TELEPHONE: (011) 792 9550/1/2, FAX: (011) 792 9553
e-mail: eeeaman@mweb.co.za Website: ernestee.co.za