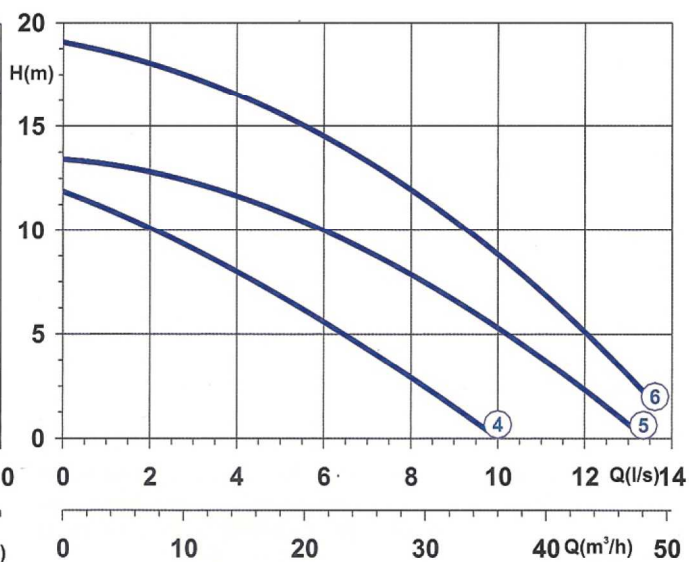
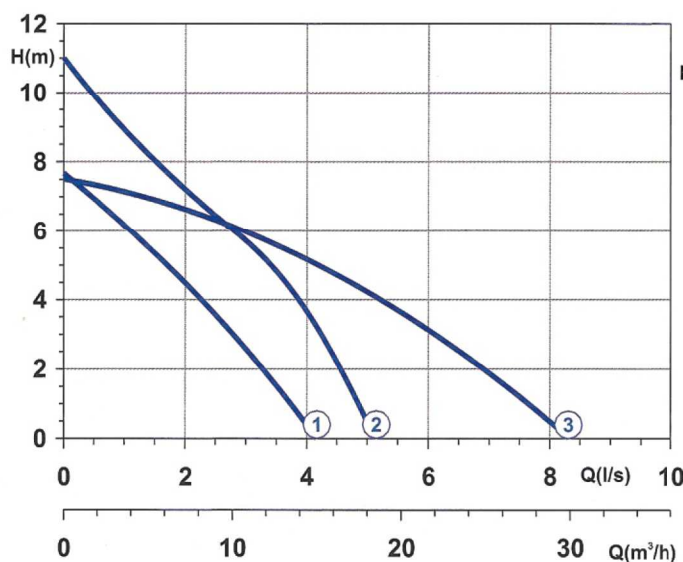
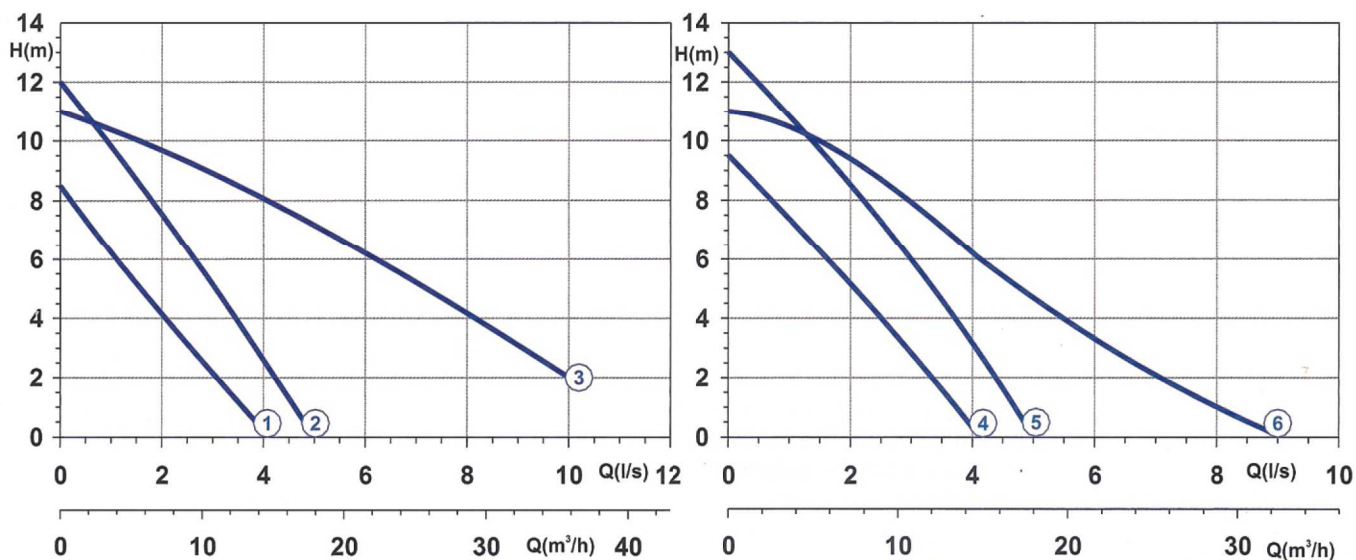



R.P.M. 2850


Curve N°	Code	Type	MOTOR				Free passage (mm)	H (mm)	L (mm)	Discharge Ø	Weight (Kg)
			Power supply	R.P.M.	Nominal power P2 (kW)	Nominal current I (A)					
1	8004807	LVG-06T0-32	3ph 400V 50Hz	2850	0,58	1,1	35	370	213	1"1/4	10,5
	8002334	LVG-06MB1-32	1ph 230V 50Hz	2850	0,58	3,5					
2	8002322	LVG-09T0-32	3ph 400V 50Hz	2850	0,9	1,8	30	410	213	1"1/4	12,5
	8009376	LVG-09MB1-32	1ph 230V 50Hz	2850	0,9	5,2					
3	8000704	LVG-09T0-50	3ph 400V 50Hz	2850	0,9	1,8	40	430	270	2"	14
	8004930	LVG-09MB1-50	1ph 230V 50Hz	2850	0,9	5,2					
4	8001812	LVG-11T0-50	3ph 400V 50Hz	2850	1,1	3,2	50	460	268	2"	20
	8001845	LVG-11MB1-50	1ph 230V 50Hz	2850	1,1	7,5					
5	8004257	LVG-15T0-50	3ph 400V 50Hz	2850	1,5	3,4	50	480	268	2"	22
	8002336	LVG-15MB1-50	1ph 230V 50Hz	2850	1,5	10,5					
6	8002182	LVG-20T0-50	3ph 400V 50Hz	2850	2,2	5,6	45	500	268	2"	25


R.P.M. 2850


Curve N°	Code	Type	MOTOR				Free passage (mm)	H (mm)	L (mm)	Discharge Ø	Weight (Kg)
			Power supply	R.P.M.	Nominal power P2 (kW)	Nominal current I (A)					
1	8001778	LDG-04T0-32	3ph 400V 50Hz	2850	0,58	1,1	10	340	160	1"1/4	9
	8001323	LDG-04MB1-32	1ph 230V 50Hz	2850	0,58	3,5					
2	8008658	LDG-07T0-32	3ph 400V 50Hz	2850	0,9	1,8	10	370	160	1"1/4	11
	8002449	LDG-07MB1-32	1ph 230V 50Hz	2850	0,9	5,2					
3	8009143	LDG-11T0-50	3ph 400V 50Hz	2850	1,1	3,2	10	420	275	2"	24,5
	8001149	LDG-11MB1-50	1ph 230V 50Hz	2850	1,1	7,5					
4	8002754	LVX-06T0-40	3ph 400V 50Hz	2850	0,58	1,1	35	365	200	1"1/2	7
	8008029	LVX-06MB1-40	1ph 230V 50Hz	2850	0,58	3,1					
5	8000876	LVX-09T0-40	3ph 400V 50Hz	2850	0,9	1,8	30	405	200	1"1/2	8,5
	8008031	LVX-09MB1-40	1ph 230V 50Hz	2850	0,9	5,2					
6	8001631	LVX-11T0-50	3ph 400V 50Hz	2850	1,1	3,2	50	480	230	2"	14
	8008201	LVX-11MB1-50	1ph 230V 50Hz	2850	1,1	7,5					